


Automatic pressure filters type NSB 20-200

Max. water temperature: 50 °C | Pipe system of galvanized steel | Filter vessel of steel | Outside surface treatment: High-quality epoxy paint | Inside surface treatment: None | Option: Hot-dip galvanizing inside and outside | Produced and CE-marked according to the Pressure Equipment Directive (PED)

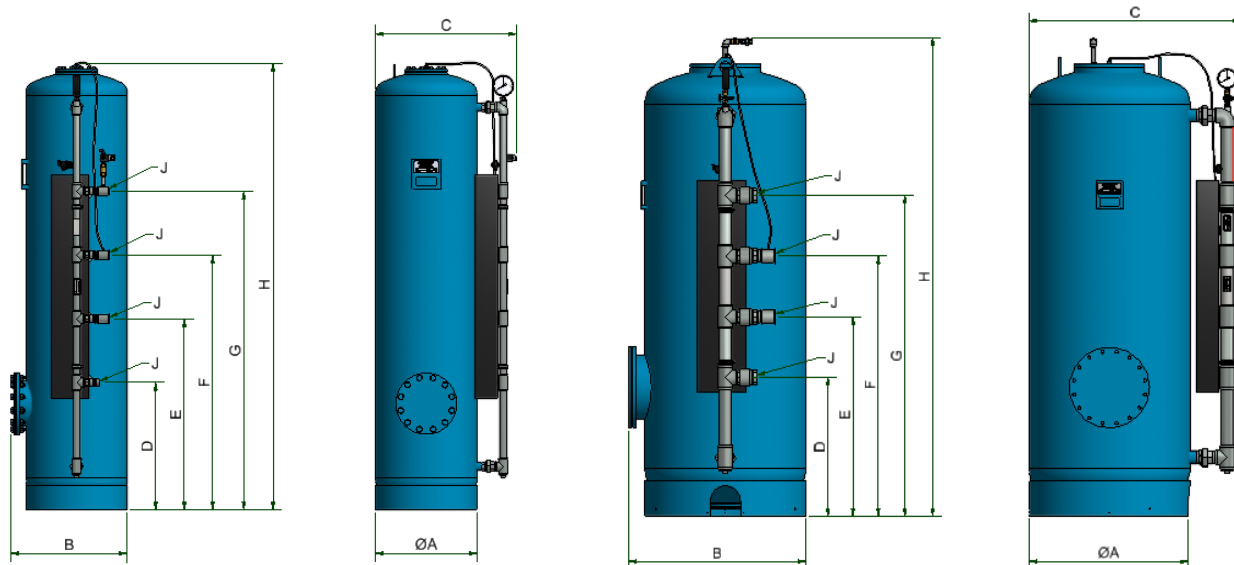

Modules 20-40-60

Modules 80-130-170-200

Flow rate and weight

Plant size	Flow rate [m³/h]	Transport weight¹ app. [kg]	Gross weight² app. [kg]
20	1.2	100	215
40	2.4	140	410
60	3.6	200	710
80	4.8	320	1400
130	7.8	400	2100
170	10.2	520	3000
200	12	600	3500

1. Weight without filling and water, with packing

2. Weight with filling and water

Measurements

Plant size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H¹ [mm]	J Connection
20	300	370	475	220	520	820	1120	1390	Rp ¾
40	400	470	575	370	670	970	1270	1680	Rp 1
60	480	550	655	600	900	1200	1500	2105	Rp 1
80	650	730	880	660	960	1260	1560	2310	Rp 1½
130	800	880	1030	690	990	1290	1590	2380	Rp 2
170	900	1010	1130	710	1010	1310	1610	2420	Rp 2
200	1000	1110	1230	730	1030	1330	1630	2450	Rp 2

1. Free height over plant minimum 300 mm

Subject to changes in design